

Housing/frame: made of extruded anodised aluminium with die-cast end caps and wide cooling fins. Supplied with 10 hooks.

Diffuser: 4 mm thick, silk-screen printed tempered glass, resistant to impact and thermal shock (UNI7142 tests, British standard 3193).

Coating end caps and hooks: in various stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. The second stage is a UV stabilizing priming.

Electric gear: 230V/50Hz power supply. Hard wire, cross section 0.50 sqmm, and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards. 2P+T terminal block (maximum allowed lead cross-section: 4 sqmm).




1165 Radon - FL asymmetric XTreme				
		CELL-F		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
FL 1x58	m. silver	20.00	413033-00	4000K - 5200lm - Ra 1b

Life lamps: 60.000 hours with electronic ballast 100.000 hours.

1166 Radon - XTreme				
		CELL-F		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
FL 2x58	m. silver	20.00	413233-00	4000K - 5200lm - Ra 1b

Life lamps: 60.000 hours with electronic ballast 100.000 hours.

With lamps designed to last through time. They require very little maintenance, reducing servicing costs while offering excellent performance. The working life of the lamp is far more superior than that of standard lamps, the electronic ballast/reactor also lasts 100.000 hours.

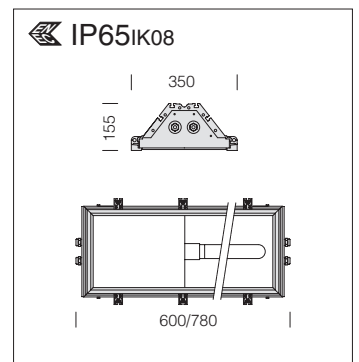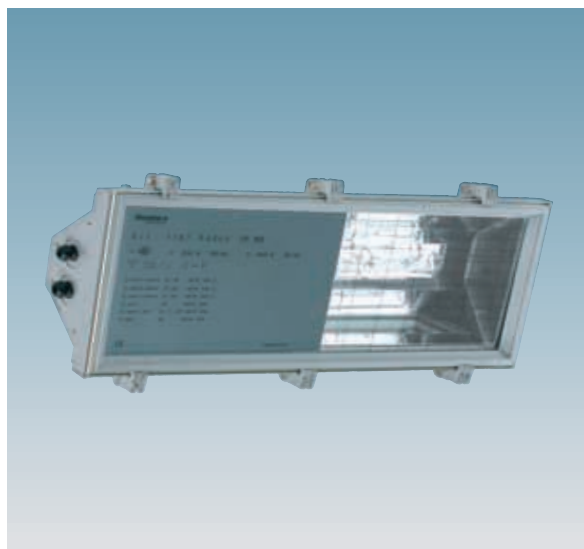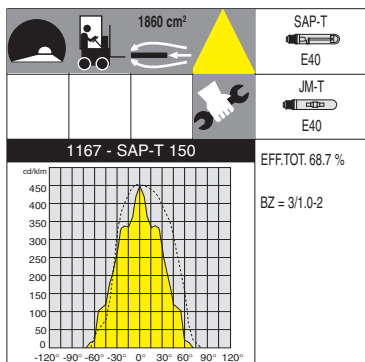

Housing/frame: made of extruded anodised aluminium supplied with no. 6 hooks.


Reflector: polished high-gloss aluminium 99.85, anodised 3µ.

1167 Radon				
		CNR		
wattage	colour	weight	code	
SAP-T 150	m. silver	9.00	413356-00	
SAP-T 250	m. silver	9.50	413357-00	


Equipped with an air-circulation valve.

1167 Radon				
		S		
wattage	colour	weight	code	
JM/SAP-T 1000	m. silver	9.00	413354-00	

To be used with electric gear box separated from the lamp compartment (acc. 1177). Equipped with an air-circulation valve.





acc. 91 mounting bracket	
stainless steel	997905
In stainless steel. Complete with steel screws. Used for fixed mounting directly on ceiling or wall.	



acc. 92 pivoting bracket	
silver	997906
Made of steel with stainless steel mounting units. For 90° fixture rotation. With protractor scale.	

IP65IK08

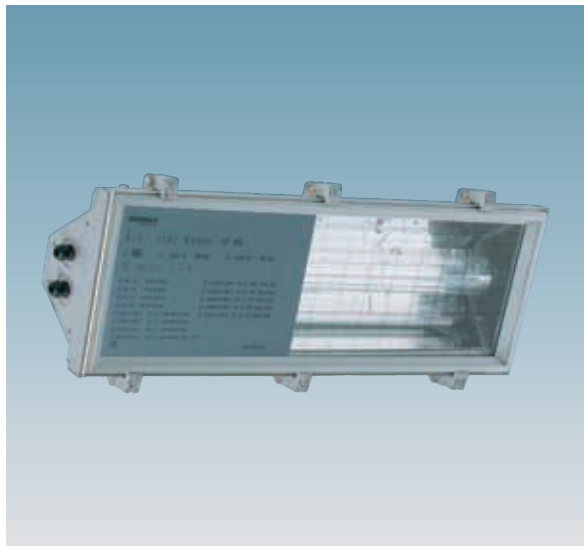



Housing/frame: made of extruded anodised aluminium with die-cast end caps and wide cooling fins.

Supplied with 10 hooks:

- SBP 55 = 6
- SBP 90 = 6
- SBP135 = 8
- SBP180 = 10



Reflector: polished high-gloss aluminium 99.85, anodised 3µ.

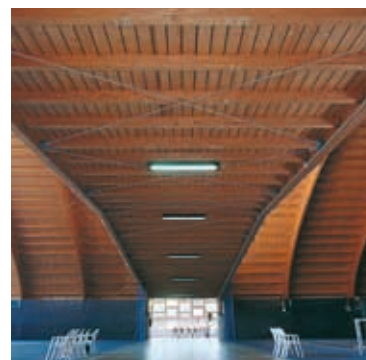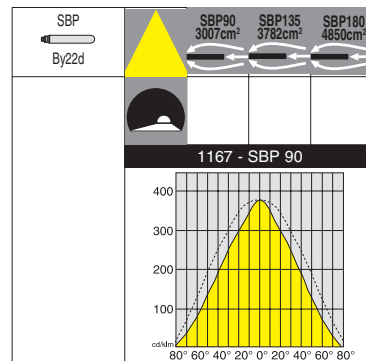

1167 Radon			
		CNR	
wattage	colour	weight	code
SBP 55	m. silver	16.25	413341-00
SBP 90	m. silver	19.10	413342-00
SBP 135	m. silver	22.30	413343-00
SBP 180	m. silver	22.40	413344-00

Equipped with an air-circulation valve.

IP65IK08

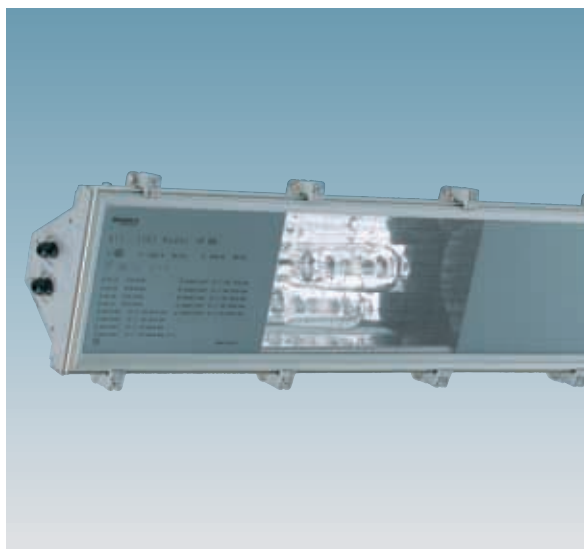


Housing/frame: made of extruded anodised aluminium with die-cast end caps and wide cooling fins.

Supplied with 8 hooks.

Reflector: polished high-gloss aluminium 99.85, anodised 3µ.

This two-lamp version provides a better colour rendering, making the fixture usable in any architectural context (e.g. façade lighting, etc.)


2x70, 2x100, 2x150, 2x250W version available on request.

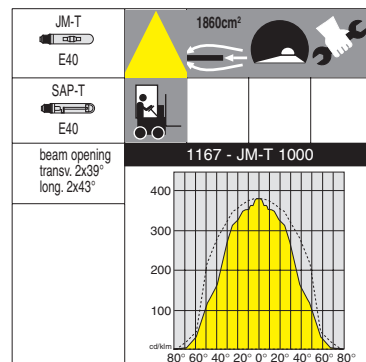

1167 Radon			
		CNR	
wattage	colour	weight	code
JM/SAP-T 1000	m. silver	28.80	413352-00
2xSAP/JM-T 400	m. silver	29.30	413351-00

Equipped with an air-circulation valve.

acc. 1177 gear CC IP65	
SAP-T/JM-T 1000	997643
IP657 aluminium box with gear tray. Weight 13.9kg. Max. distance from fixture 3m.	



acc. 157 hook for Ø60 tube	
stainless steel	998091
To be used when installing the floodlight on a Ø60 tube. 2 per pack.	

