

Hot-dip galvanised steel poles.



Equipped with inspection window (293x94 mm), removable 4-pole terminal block, max. cross-section 16 sqmm. Supplied with 2 16A safety fuses. With hole for insertion of power supply cable; with holes at different heights according to use.

The version with base is supplied with a base and 4 log bolts to be sunk into the ground, bolts and caps.


Standard insulation class II.

**NOTE:** When using Insulation Class I fixtures, appropriate grounding connections should be included in the system.


**NOTE:** The possibility to attach an assembly to the pole is subject to a wind pressure resistance assessment in the areas regulated by CNR-UNI standard 10032-67, according to load assumptions in UNI standard 40/6.

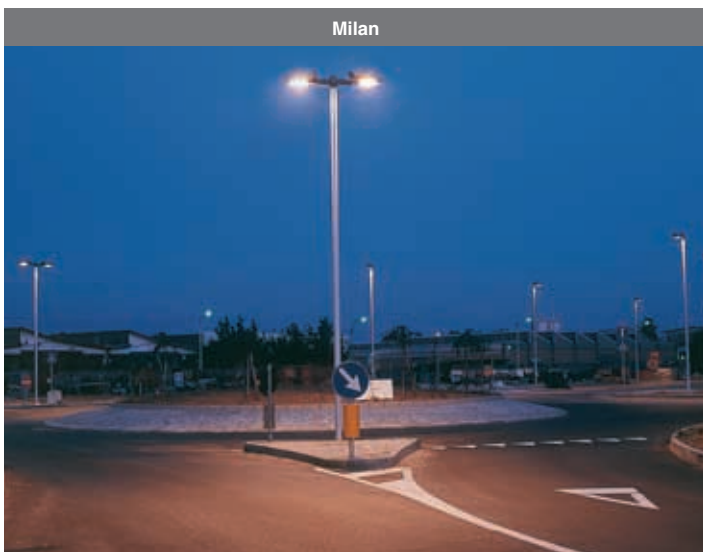


<b>acc. 368 mast-top-pole connec.</b>	
galvanized	426996
In galvanized steel. To be used as a mast-top-pole connection on poles acc. 1491/1493.	

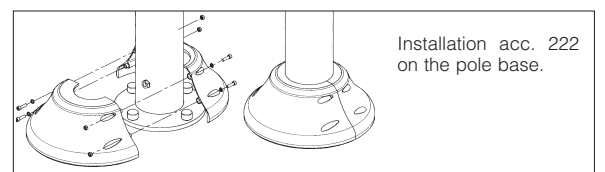

Installation acc. 222 on the pole base.



<b>acc. 222 base pole cover</b>	
s. silver	991378
bla.	991380
graphite	991381
In die-cast aluminium. To be used as a base pole cover acc. 1493.	

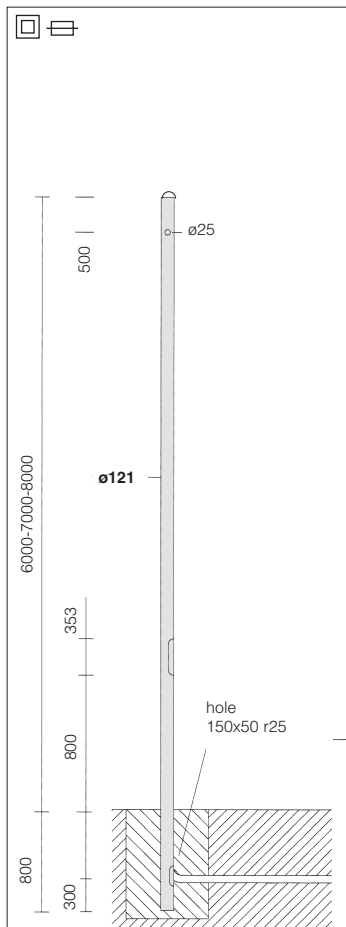

**ON REQUEST**  
Possibility of supplying poles with the following colour paint finishes:  
RAL 3003, 5011, 7026, 9011, 8015, 5002 7024, 7016, 9006, 7037, 6004, 8019, 6011, 7022, 1015, 9010.

Inspection door with easily removable terminal board for quick connection.

Concrete base dimensions (subject to soil variations)

**acc 1491 steel pole to be buried**


h a. 6000	h u. 800	galvanized	426150
h a. 7000	h u. 800	galvanized	426151
h a. 8000	h u. 800	galvanized	426152

Supplied with end cap and holes to let the cables through.

**acc 1491 painted pole with colour choice**

h a. 6000	h u. 800	paint	
h a. 7000	h u. 800	paint	
h a. 8000	h u. 800	paint	

Supplied with end cap and holes to let the cables through. The painted version is with RAL selected colour as indicated.

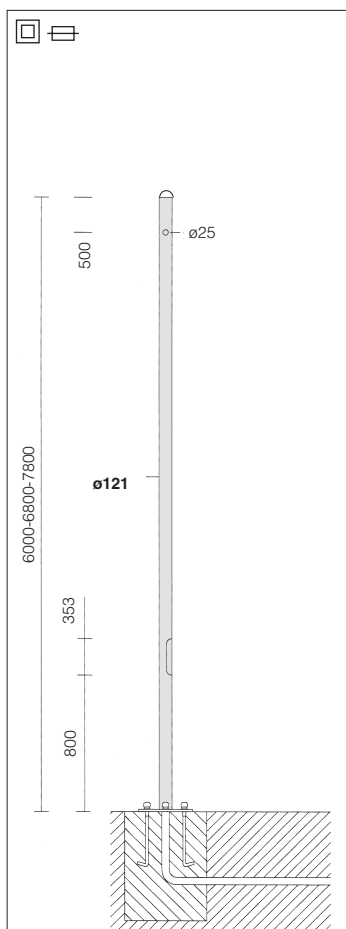

**ON REQUEST**  
Possibility of supplying poles with the following colour paint finishes:  
RAL 3003, 5011, 7026, 9011, 8015, 5002 7024, 7016, 9006, 7037, 6004, 8019, 6011, 7022, 1015, 9010.

Inspection door with easily removable terminal board for quick connection.

For correct installation of pole and base, the ceiling cap should be fitted as shown in the assembly drawing featured opposite.

**acc 1493 steel pole with base**

h a. 6000	galvanized	426160
h a. 6800	galvanized	426161
h a. 7800	galvanized	426162

Supplied with end cap and holes to let the cables through.

**acc 1493 steel pole with base**

h a. 6000	paint	
h a. 6800	paint	
h a. 7800	paint	

Supplied with end cap and holes to let the cables through. The painted version is with RAL selected colour as indicated.

