

Housing: made of die-cast aluminium.

Reflector: anodised, polished and hammered aluminium 99.85.

Diffuser: tempered glass, resistant to impact and thermal shock.

Coating: in several stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV stabilising priming; final stage: a rough finish with frosted silver or graphite grey paint.





Electric gear: 230V-50Hz power supply with heat protection.

Standard supply: electric gear on a removable tray. Control device to adjust the light on walls creating three types of light beams.


1636 Emisfero 2 - direct light				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
JM-TS 70	graphite + blue	7.20	420550-00	3000K - 5100lm - Ra 2a
JM-TS 70	graphite + white	7.20	420551-00	
CDM-TS 70	white + blue	7.20	420556-00	3000K - 6500lm - Ra 1b
CDM-TS 70	white + white	7.20	420557-00	(ideal for indoor installations)




On request JM-TS version in white colour (ideal for indoor installation).

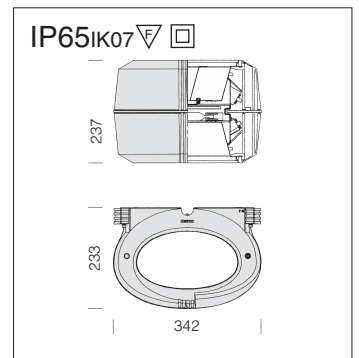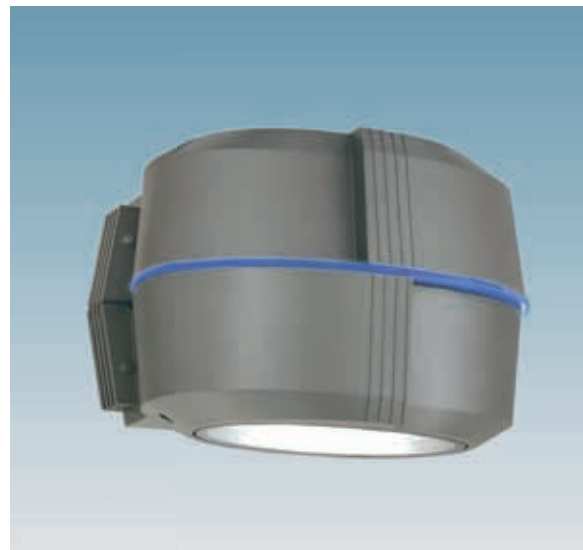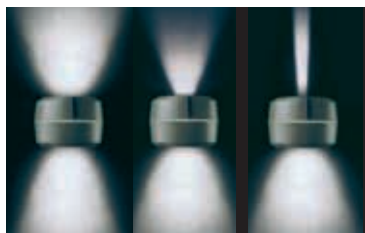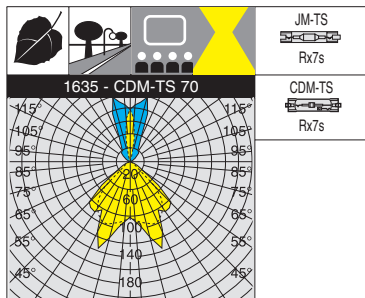

1635 Emisfero 1 - direct/indirect light				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
JM-TS 70	graphite + blue	7.20	420540-00	3000K - 5100lm - Ra 2a
JM-TS 70	graphite + white	7.20	420541-00	
CDM-TS 70	white + blue	7.20	420546-00	3000K - 6500lm - Ra 1b
CDM-TS 70	white + white	7.20	420547-00	(ideal for indoor installations)

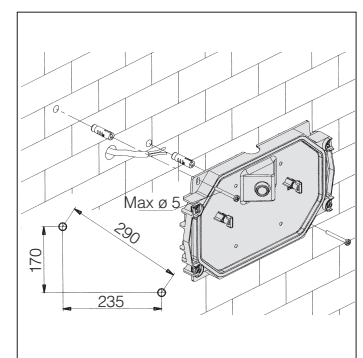

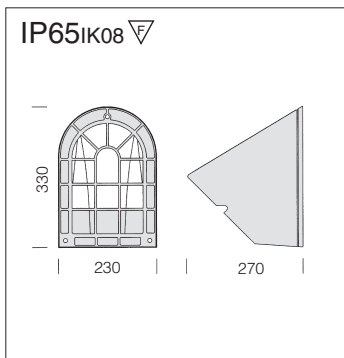

Housing/frame: In die-cast aluminium.


Reflector: In high-grade 99.85 aluminium.

Diffuser: tempered glass, resistant to impact and thermal shock.



Coating: In several stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV-stabilising primer; final stage rough finish with graphite acrylic coating.

Electric gear: 230V/50Hz supply with thermal protection.


Standard supply: When open, the front frame stays attached to the housing, for easy maintenance.

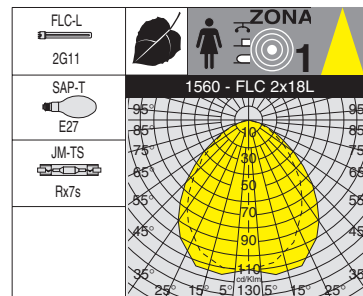


1560 Lord - with grid				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
FLC 2x18L	white	4.80	421101-00	4000K - 1200lm - Ra 1b
FLC 2x18L	graphite	4.80	421103-00	
SAP-T 70	white	5.50	421121-00	2000K - 6000lm - Ra 4
SAP-T 70	graphite	5.50	421123-00	
JM-TS 70	white	5.60	421151-00	4000K - 5700lm - Ra 2b
JM-TS 70	graphite	5.60	421153-00	

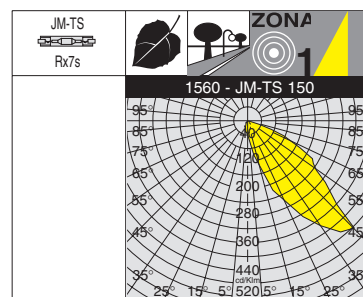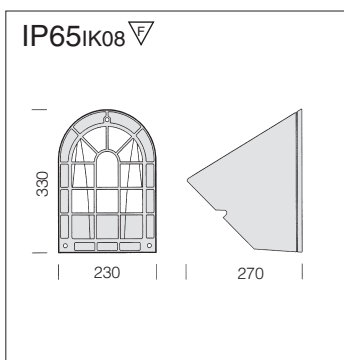

1560 Lord asymmetric - with grid				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
JM-TS 150	white	6.60	421161-00	4200K - 12000lm - Ra 2b
JM-TS 150	graphite	6.60	421163-00	



acc. 89 pole attachment Ø 60
 graphite 991214
 Die-cast aluminium painted by cationic electrocoating. Adapter for attachment on Ø 60 pole.



acc. 85 plate angled at 45°
 graphite 991210
 Made of steel. To install art. Wall mounted Lord with the front glass parallel to the ground.