
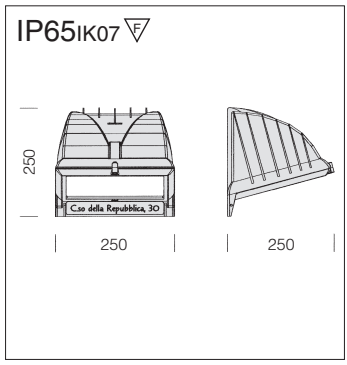


1262 - FLC 2x18

- JM-TS Rx7s
- FLC-D G24d-2
- SAP-TS Rx7s

On request pictograph stickers

Housing/Frame: made of die-cast aluminium.

Reflector: sheared and bended high-grade aluminium 99.85.


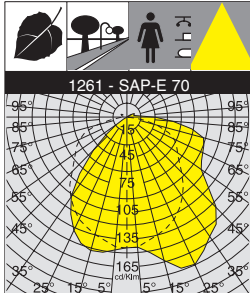
Diffuser: matt tempered glass, resistant to impact and thermal shock.

Coating: in several stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV stabilising priming; final stage: with frosted silver or graphite grey paint.

Electric gear: 230V/50Hz power supply: Hard wire, cross-section 0.50 sqmm (FLC) PVC-HT sheathing or flexible terminated wire; silicone insulation. 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).


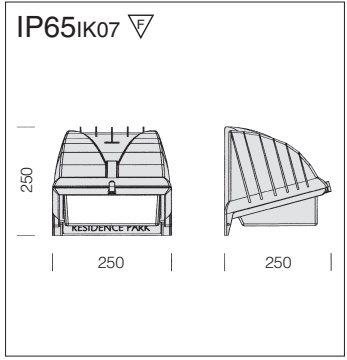
Standard supply: when open, the front frame stays attached to the housing for easy maintenance.

1262 Rhea						
		CNRL		CNRL-E		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	Kelvin - ølm - Ra
FLC 2x18D	graphite	4.00	420760-00			4000K - 1200lm - Ra 1b
JM-TS 70	graphite	4.50	420761-00			4000K - 5700lm - Ra 1b
SAP-TS 70	graphite	4.50	420762-00			2000K - 6800lm - Ra 4
FLC 1x18D/E	graphite			4.50	420763-00	4000K - 1200lm - Ra 1b


1261 - SAP-E 70

- JM-E E27
- FLC-FLAT 2G10
- SAP-E E27

Diffuser: in vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilised.


1261 Rhea - with diffuser						
		CNRL		CELL		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	Kelvin - ølm - Ra
JM-E 70	graphite	4.50	420771-00			4000K - 5100lm
SAP-E 70	graphite	4.50	420772-00			2000K - 5600lm - Ra 4
FLC 24 FLAT	graphite			4.50	420773-00	4000K - 1700lm - Ra 1b




acc. 89 - ø 60 mounting unit

graphite	991214
----------	--------

Die-cast aluminium painted by cationic electrocoating. Adapter for attachment on Ø 60 pole of art. 1261/1262.

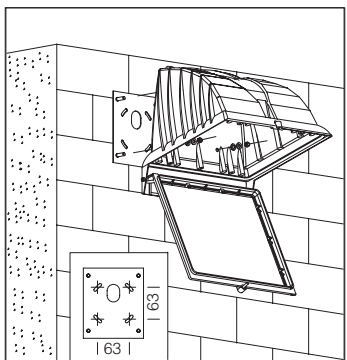

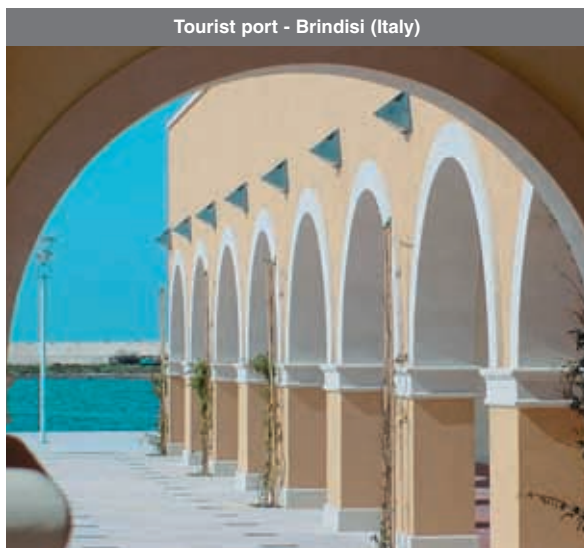

Housing/Frame: made of die-cast aluminium.



Reflector: sheared and curved high-grade aluminium 99.85.

Diffuser: tempered glass, resistant to impact and thermal shock.


Coating: in several stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV stabilising priming; final stage: with frosted silver or graphite grey paint.

Electric gear: 230V/50Hz power supply: Hard wire, cross-section 0.50 sqmm (FLC) PVC-HT sheathing or flexible terminated wire; silicone insulation. 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).

Standard supply: when open, the front frame stays attached to the housing for easy maintenance.

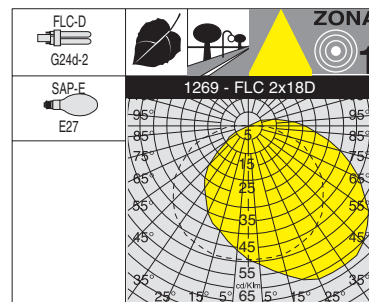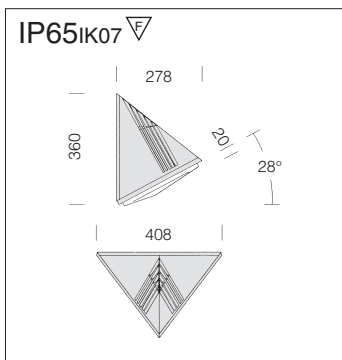

RESIDENTIAL AMENITIES

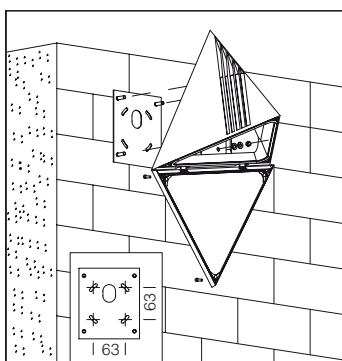

1269 Triade				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
FLC 2x18D	graphite	4.40	420521-00	4000K - 1200lm - Ra 1b
FLC 2x18D	white	4.40	420526-00	
SAP-E 70	graphite	4.50	420525-00	2000K - 5600lm - Ra 4
SAP-E 70	white	4.50	420529-00	