

**Housing:** in fibreglass nylon, UV-stabilised.

**Reflector:** in high-gloss aluminium.




**Diffuser:** Anti-glare, vandal resistant, V2 self-extinguishing, UV-stabilised polycarbonate; smooth, dustproof outside.

**Electric gear:** 230V/50Hz power supply (CNRL). Hard wire, 0.50 sqmm cross section. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.



**Equipment:** gasket in environment-friendly material. Supplied with mounting plate. Cable gland in f.g. nylon Ø 1/2, gas thread (cable min Ø 9 max Ø 12).

1287 Garden							
		CNRL		CELL		CNRL-E	
wattage	colour	weight	code	weight	code	weight	code
FLC 2x18L	black	1.30	420841-00	1.30	420841-08	1.60	420841-07*
FLC 2x18L	s. silver	1.30	420843-00	1.30	420843-08	1.60	420843-07*

FLC 2x18L = 4000 K - 1200 lm - 1b N.B. \* CNRL-E version with lamp FLC 1x18L only.

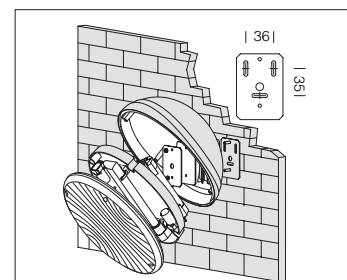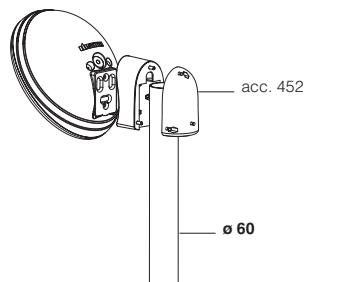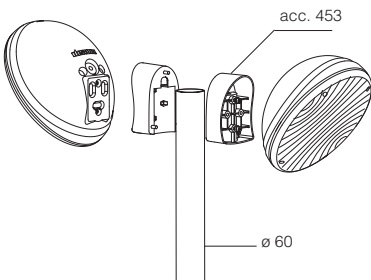


Wall mounting with bracket supplied as a standard feature.

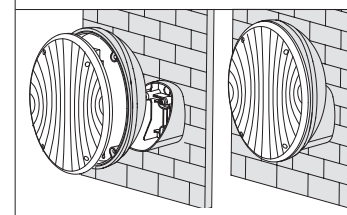

**acc. 451 wall/ceiling attachment**

black	991250
s. silver	991251


Made of fibreglass nylon which enables the Garden fixture to be mounted directly on a wall or ceiling with a difficult surface.



**acc. 452 single pole connection**

black	991252
s. silver	991253

Made of fibreglass nylon enables the Garden fixture to be mounted on a Ø60 pole.



**acc. 453 double pole connection**

black	991254
s. silver	991255

Made of fibreglass nylon which enables two Garden fixtures to be mounted on a Ø60 pole.

