



**Housing:** made of die-cast aluminium, rotating on two pins, adjustable using a screw placed on a scaled spacer.

**Base:** made of die-cast aluminium.

**Columns:** Made of natural anodised extruded aluminium.

**Reflector:** made of hammered, anodised and polished aluminium 99.85, or turned polished aluminium.

**Diffuser:** tempered glass, resistant to impact and thermal shock.

**Coating:** in several stages. First stage: epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV stabilising priming; final stage a rough finish with graphite acrylic paint (it has passed the UNI ISO 9227 1000 hr test).



**Electric gear:** 230V-50Hz power supply with heat protection.



For Powered triple optic RGB Totem version, see chapter LED and Mutanti




Adjustable floodlight.

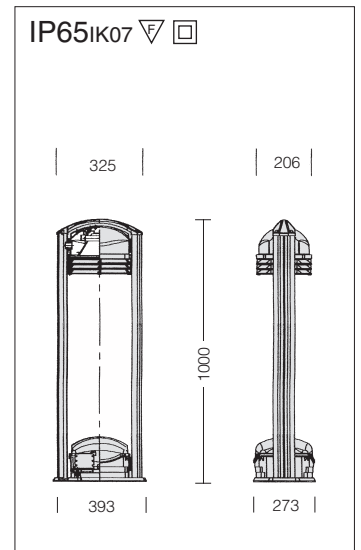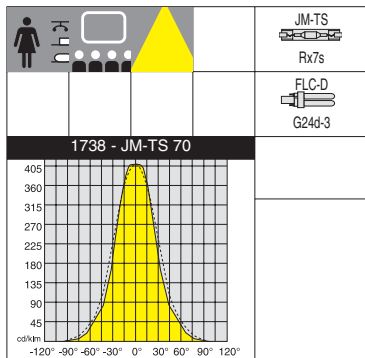






1738 Totem 3 - with base				
		CNRL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - olm - Ra
JM-TS 70	sil. + grap.	9.00	511311-00	4000K - 5700lm - Ra 1b
FLC 2x26D	sil. + grap.	9.00	511312-00	4000K - 1800 lm - Ra 1b

**Reflector:** made of hammered, anodised and polished aluminium 99.85, or turned polished aluminium.

**Diffuser:** tempered matt glass, resistant to impact and thermal shock.



acc. 173 sign	
clear	991368
Made of Plexiglas; illuminated when the lamp is on. Inscriptions on request.	

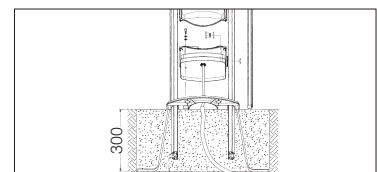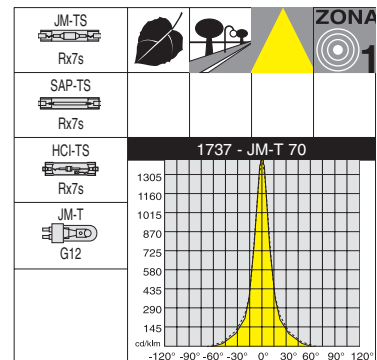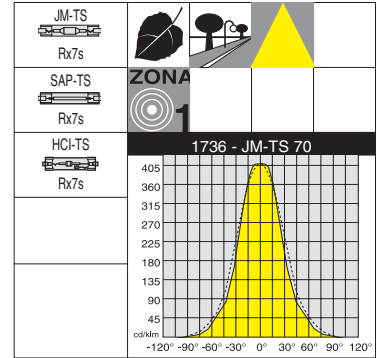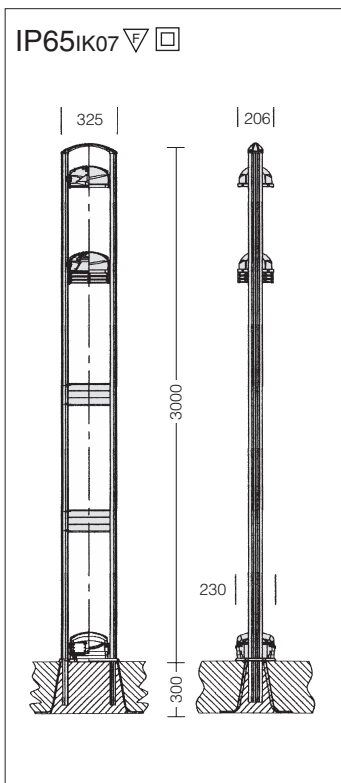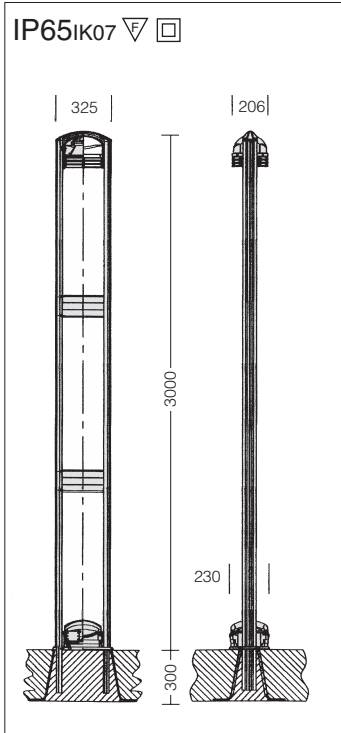

**1736 Totem 1 - one-lamp, to be buried in the ground**

wattage	colour	CNRL		Lamps (Ta=25°C)
		weight	code	Kelvin - ølm - Ra
<b>SAP-TS 70</b>	sil. + grap.	18.00	511210-00	2000K - 6800lm - Ra 4
<b>JM-TS 70</b>	sil. + grap.	18.00	511211-00	4000K - 5700lm - Ra 1b
<b>HCI-TS 70</b>	sil. + grap.	18.00	511212-00	4200K - 6700lm - Ra 1a

**1737 Totem 2 - two-lamp, to be buried in the ground**

wattage	colour	CNRL		Lamps (Ta=25°C)
		weight	code	Kelvin - ølm - Ra
<b>SAP-TS 70+ JM-T 70</b>	sil. + grap.	20.00	511220-00	2000K - 6800lm - Ra 4
<b>JM-TS 70+ JM-T 70</b>	sil. + grap.	20.00	511221-00	4000K - 5700lm - Ra 1b
<b>HCI-TS 70+ JM-T 70</b>	sil. + grap.	20.00	511222-00	4200K - 6700lm - Ra 1a

lampada JM-T 70: 4200 K - 5800 lm

