

1747 Totem 5 - POWERLED RGB

		CTL		Beam angle	W tot	Luminous flux
wattage	colour	weight	code			
3,8W LED RGB	graphite	6.00	511431-00	25°	3x3,8W	R=27lm - G=15lm - B=53lm


Supplied with 3 RGB triple lens modules RGB P=3,8W cad, 1 ballast, 1 Master and 1IRE receiver.

Housing: Made of die-cast aluminium, rotating on two pins, adjustable using a screw placed on a scaled spacer.

Columns: Made of natural anodised extruded aluminium (h columns = 1800).

Working life: 50000h (from -30° a +75° C - Ta=25°C).


Multiple installation Totem RGB

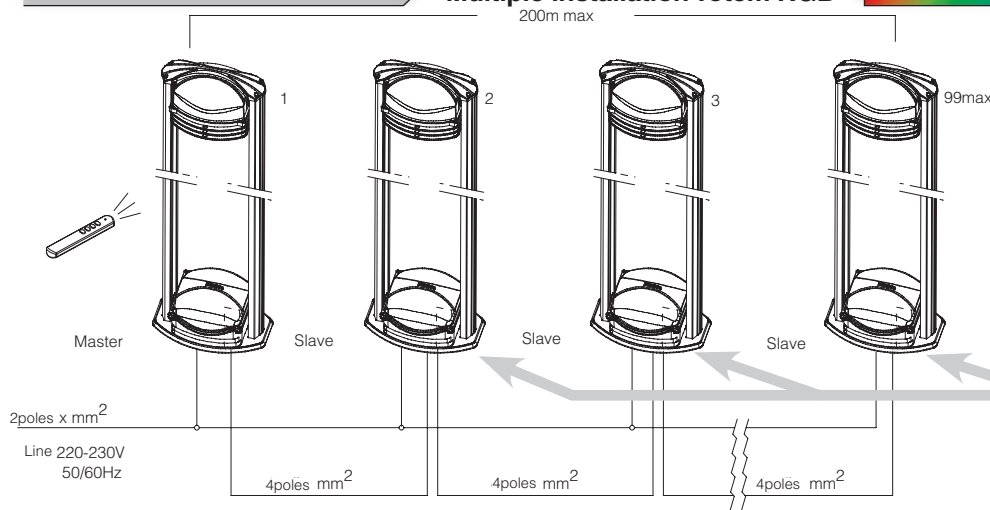

A group of lighting fixtures (max 99) can be remote controlled by setting fixtures complete with a SLAVE colour control next to art. 1747 - Totem.


In the order, specify TOTEM complete with Slave

Installation example

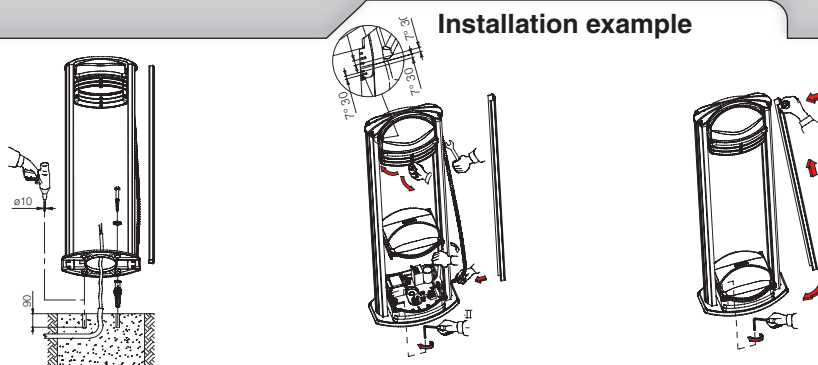

It is advised to install Totem according to the following information.

IP65IK08

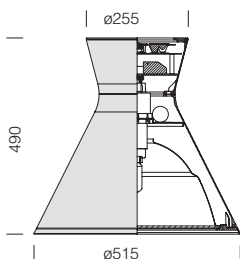

Housing/Frame: in die-cast aluminium, can be installed using acc., hook, rods or arms.

Diffuser: tempered glass, 5 mm thick, resistant to thermal shock and impact.

Working life: 50000h (from -30° a +75° C - Ta=25°C).




3166 Iride - direct/indirect light with POWERLED RGB

		CNRL + CTL		W tot	Luminous flux
wattage	colour	weight	code	Beam angle	
CDO-TT150 + 3,8W LED RGB	s. silver	11.50	326570-00	25°	4x3,8W R=27lm - G=15lm - B=53lm

Supplied complete with 4 RGB triple lens modules, P=3.8W each, P=20W ballast with A= 350mA constant current flow, Master and IRE receiver. In the order, specify Iride with Slave. Use acc. 302 and 381 or 382 for wall mounting. Use acc. 380 for ceiling mounting.


Multiple installation Iride RGB

A group of lighting fixtures (max 99) can be remote controlled by setting fixtures complete with a SLAVE colour control next to art. 3166 – Iride.

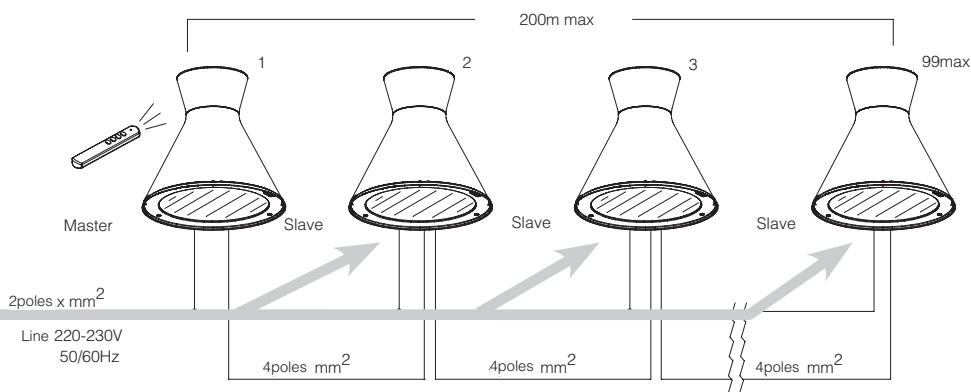


In the order, specify IRI-DE complete with Slave

acc. 380 suspension	
s. silver	326500
Supplied with three steel cables. To be used with direct/ indirect light fixtures.	



acc. 302 wall connection	
s. silver	426974
graphite	426975
Made of aluminium. For arm acc. 381 installation.	



RGB remote control	
	986561-00
For on/off switching and to regulate colour change programs.	



acc. 381 short arm	
s. silver	326503
To be used with acc. 302 for wall installation.	

