




Housing: Galvanized steel stove pre-enamelling using white polyester resin.


Electric gear: automatic line and 100% tested on the line. 230V/50Hz (CNR) power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath, resistant up to 90°, according to CEI 20-20 standards. Quick connector +T, maximum allowed lead cross section: 2.5 sq mm.

Equipment: Quick connector for electrical line and door for electrical connection. Snap fastening optics, which remain attached using safety straps.




Installation: only for contact mounting on the scored optics, max 38 mm.



acc. 203 fuse	
984814	
3,15A fuse. With fuse holder to be installed inside the fixture.	



acc. 320 safety cord	
998004	
Steel safety cord.	

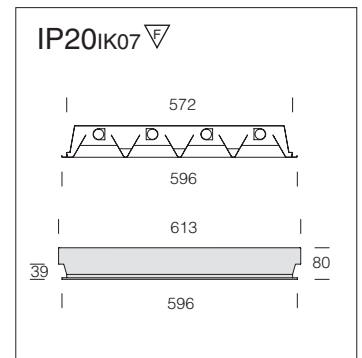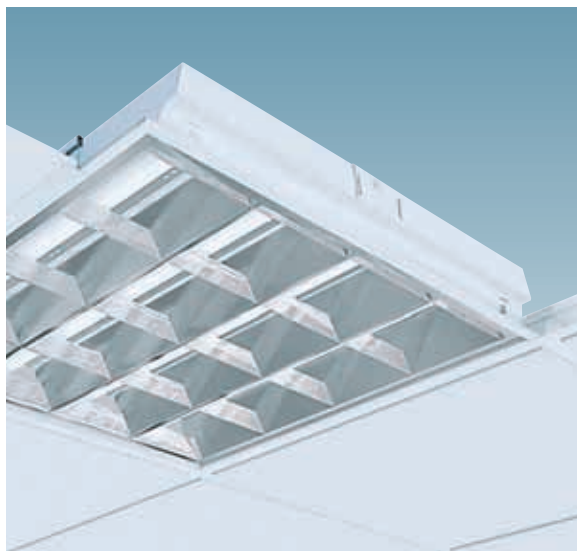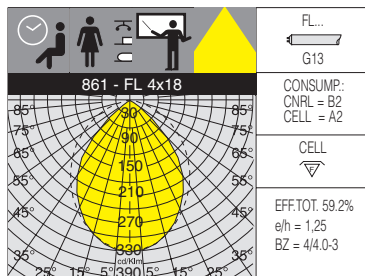

Optics: anti-glare, pressed and frosted aluminium, with scored optics.

861 Ecomfort T5 - matt scored optical								
		CELL		CELL-E		CELL-D		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	weight	code	Kelvin - olm - Ra
FL 4x14	white	3.80	150210-00	4.40	150210-07	3.90	150210-52	4000K - 1200lm - Ra 1b


861 Ecomfort T8 - matt scored optical								
		CNRL		CNRL-E		CELL		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	weight	code	Kelvin - olm - Ra
FL 4x18	white	4.70	150215-00	5.30	150215-07	3.90	150215-08	4000K - 1350lm - Ra 1b

Housing: Galvanized steel stove pre-enamelling using white polyester resin.


Electric gear: automatic line and 100% tested on the line. 230V/50Hz (CNR) power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath, resistant up to 90°, according to CEI 20-20 standards. Quick connector +T, maximum allowed lead cross section: 2.5 sq mm.

Equipment: Quick connector for electrical line and door for electrical connection. Snap fastening optics, which remain attached using safety straps.




Installation: only for contact mounting on the scored optics, max 38 mm.



acc. 203 fuse	
984814	
3,15A fuse. With fuse holder to be installed inside the fixture.	



acc. 320 safety cord	
998004	
Steel safety cord.	

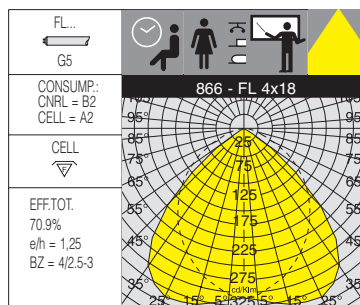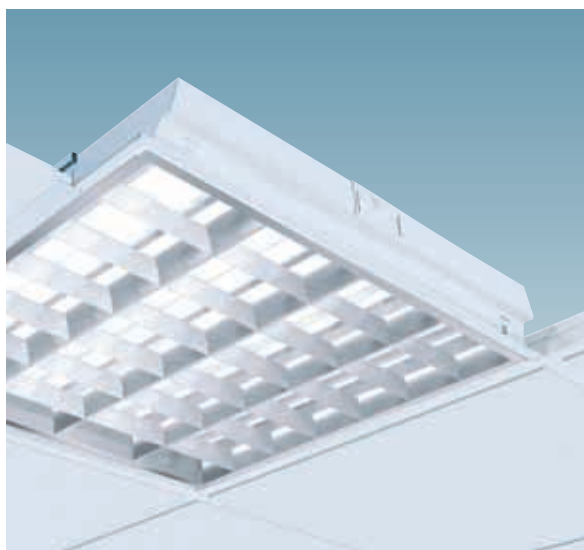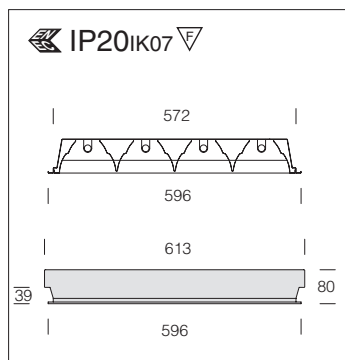




Optics: In matt aluminium with scored optics.

866 Rendicomfort T5 - matt scored optical

		CELL		CELL-E		CELL-D		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra
FL 4x14	white	3.90	150521-00	4.50	150521-07	4.00	150521-52	4000K - 1200lm - Ra 1b

866 Rendicomfort T8 - matt scored optical

		CNRL		CNRL-E		CELL		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra
FL 4x18	white	4.70	150527-00	5.30	150527-07	3.90	150527-08	4000K - 1350lm - Ra 1b

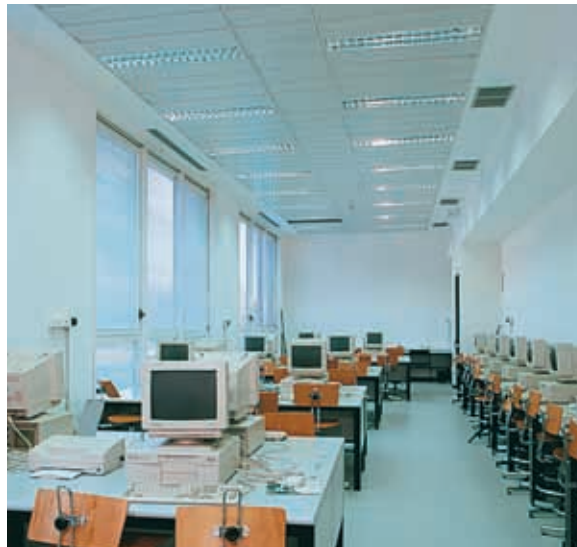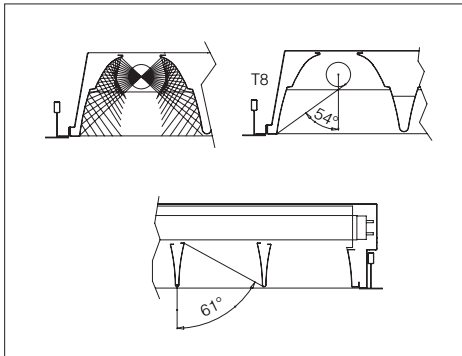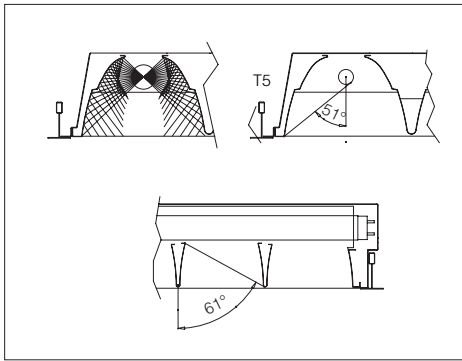



Housing: Galvanized steel stove pre-enamelling using white polyester resin.

Electric gear: automatic line and 100% tested on the line. 230V/50Hz (CNR) power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath, resistant up to 90°, according to CEI 20-20 standards. Quick connector +T, maximum allowed lead cross section: 2.5 sq mm.


Equipment: Quick connector for electrical line and door for electrical connection. Snap fastening optics, which remain attached using safety straps.

Installation: only for contact mounting on the scored optics, max 38 mm.



On request: with quick connector socket

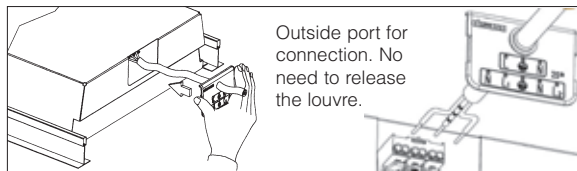

acc. 320 safety cord	
998004	
Steel safety cord.	




acc. 203 fuse	
984814	
3,15A fuse. With fuse holder to be installed inside the fixture.	

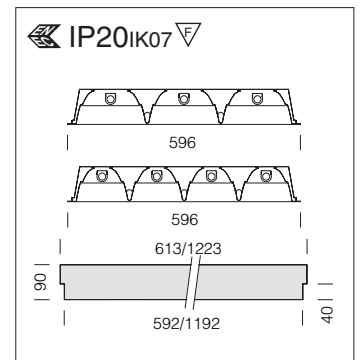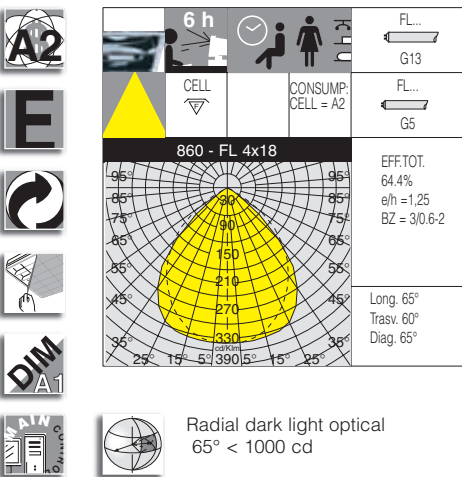

Darklight Fixtures: Dark light double parabolic louvers, in matt plated aluminium 99.85, anodized 2µ. Very low luminance.

860 Comfortlight T5 - matt optical 99,85								
		CELL		CELL-E		CELL-D		Lamps (Ta=25°C)
weight	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra
FL 4x14	white	5.00	150437-00	5.50	150437-07	5.10	150437-52	4000K - 1200lm - Ra 1b

860 Comfortlight T8 - matt optical 99,85								
		CNRL		CNRL-E		CELL		Lamps (Ta=25°C)
weight	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra
FL 4x18	white	5.10	150441-00	6.80	150441-07	4.80	150441-08	4000K - 1350lm - Ra 1b
FL 4x36	white	11.00	150442-00	12.00	150442-07	10.00	150442-08	4000K - 3350lm - Ra 1b

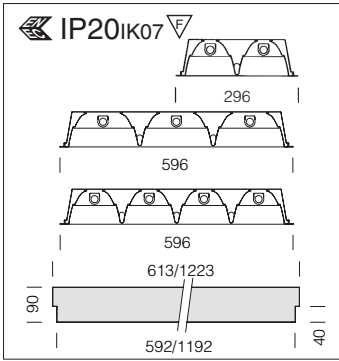

Darklight Fixtures: Dark light double parabolic louvres, in high-gloss plated aluminium 99.85. Anti-glare and anti-iridescence, very low luminance.

