



Rozzano (Milan)



Housing: In vandal-resistant, self-extinguishing, UV-stabilised, anti-yellowing RAL7035 polycarbonate.

Electric gear: 230V/50Hz power supply (CNR). Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P+T terminal block, with maximum allowed lead cross section of 2.5 sqmm.


Equipment: Electric gear placed in the upper part of the fixture to avoid contact with live parts during maintenance.

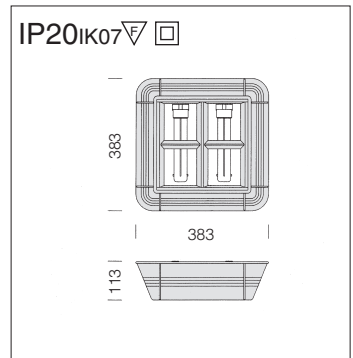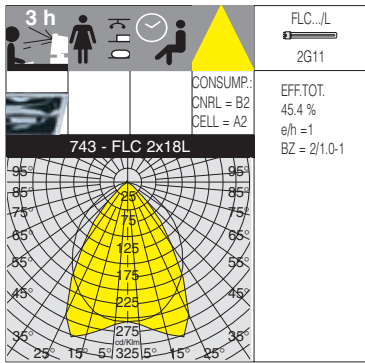


Louvre: high gloss 99.85 aluminium louvre, anti-reflection, anti-iridescence, low luminance.

743 Pratica - high-gloss louvre 99,85


		CNRL		CELL		CNRL-E		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra
FLC 2x18L	grey	1.90	141810-00	1.40	141810-08	2.60	141810-07	4000K - 1200lm - Ra 1b

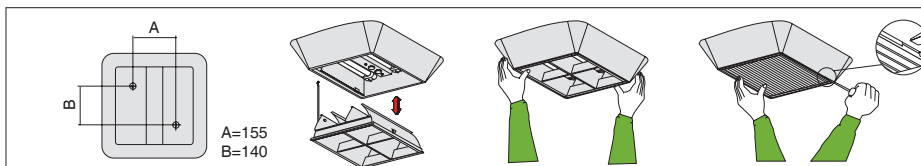


Snap fastened louvre, it remains attached hanging on nylon safety cords.
Mounting instructions: extremely easy and rapid installation. After mounting the fixture housing on the ceiling using the two screws, the optics are snap fitted in place.

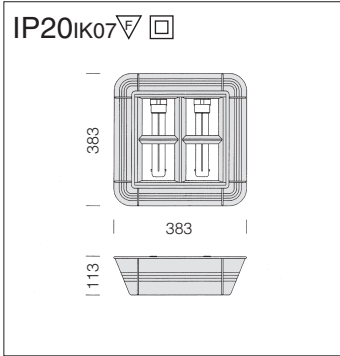


Louvre: low luminance matt aluminium louvre.

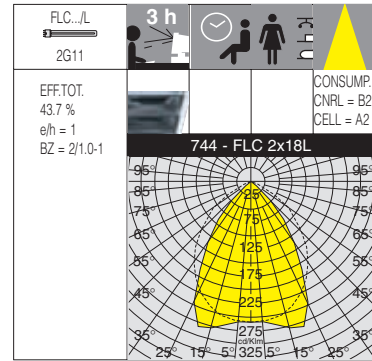

744 Pratica - matt optical								
		CNRL		CELL		CNRL-E		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra
FLC 2x18L	grey	1.90	141815-00	1.40	141815-08	2.60	141815-07	4000K - 1200lm - Ra 1b

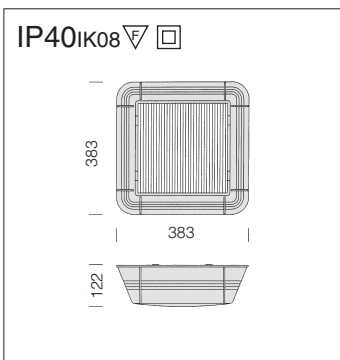

Diffuser: flat diffuser in transparent vandal-resistant, V2 self-extinguishing, UV-stabilised polycarbonate, with lengthwise prismatic faceting and internal silking for better glare control.

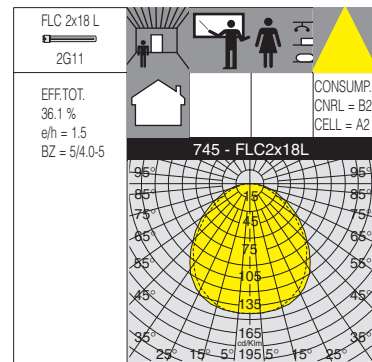

745 Pratica - flat diffuser								
		CNRL		CELL		CNRL-E		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra
FLC 2x18L	grey	2.10	141820-00	1.60	141820-08	2.80	141820-07	4000K - 1200lm - Ra 1b