

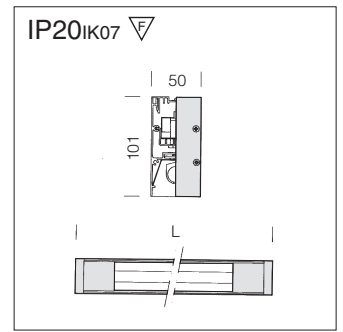
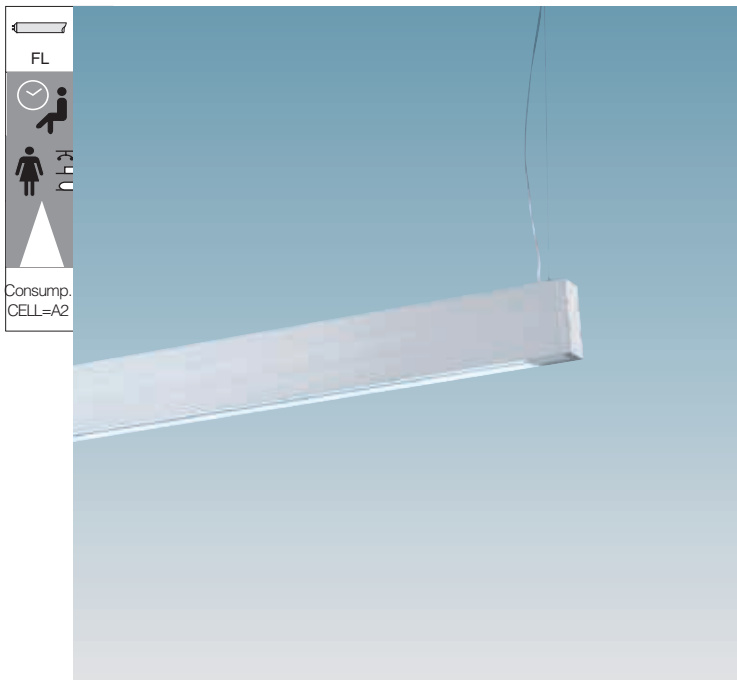


mt	Watt	colour	Code
			<b>Fosnova</b>

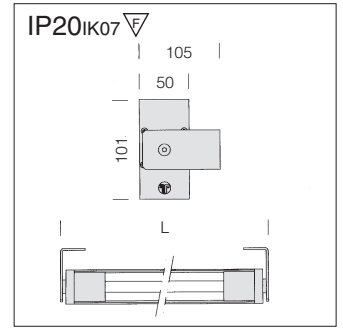


<b>Liset suspension</b>			<b>CELL</b>
L = 1360	track+LED blue	natural oxidised alum.	<b>15978</b>
L = 1820	FL 1x54+track	natural oxidised alum.	<b>16175</b>
L = 1820	FL 1+1x54	natural oxidised alum.	<b>16473</b>
L = 1360	FL 1x54	natural oxidised alum.	<b>16571</b>

Suspensions are to be acquired separately, see pag. 282


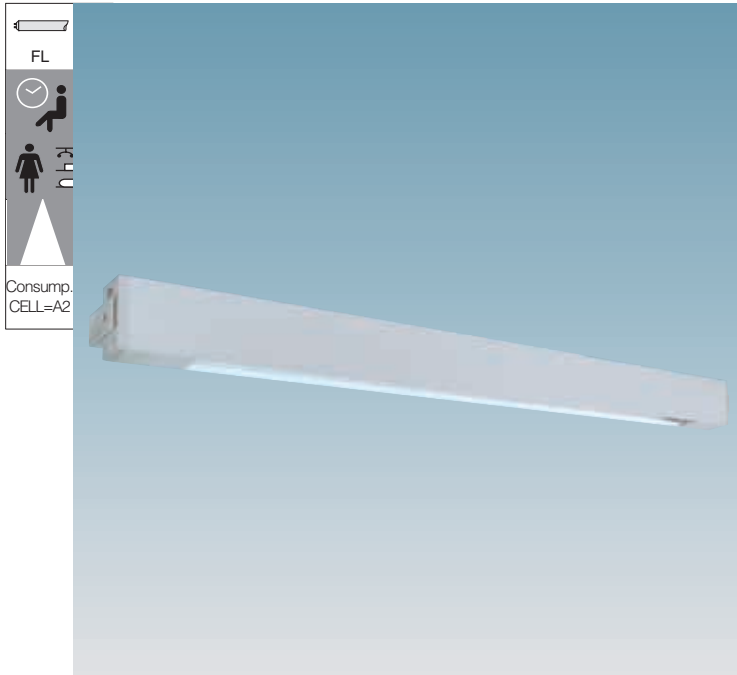


<b>Liset wall</b>			<b>CELL</b>
L = 1840	FL 1+1x54	natural oxidised alum.	<b>16873</b>
L = 1380	FL 1x54	natural oxidised alum.	<b>16971</b>

Completed with wall brackets.

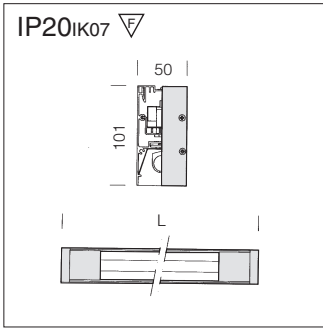


**Liset ceiling version** **CELL**  
 L = 1360 FL 1x54 natural oxidised alum. **16271**  
 L = 1360 direct track natural oxidised alum. **16274**  
 To be completed with tie-rod for the ceiling version cod. 25873

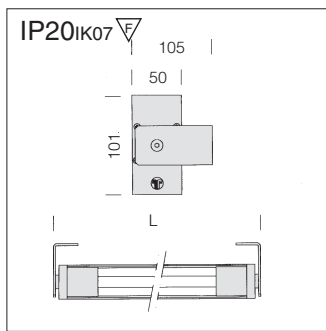
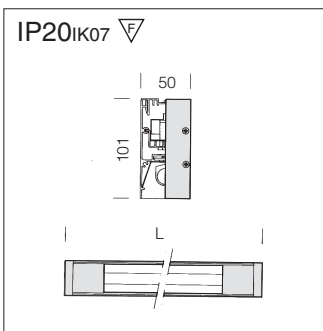


**Liset suspension with LED** **CELL**  
 L = 1360 FL 1x54+LED blue natural oxidised alum. **15976**

**Liset wall with LED** **CELL**  
 L = 1380 FL 1x54+LED blue natural oxidised alum. **16776**

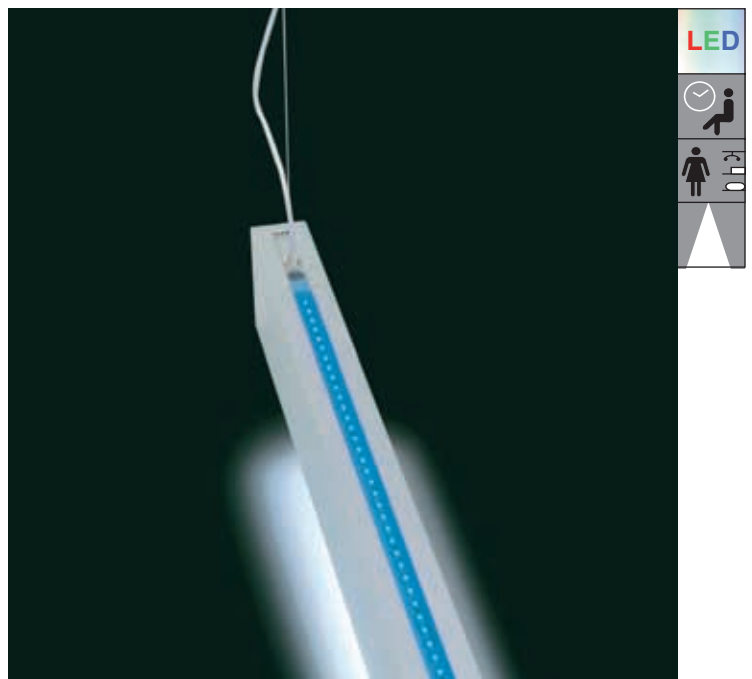


On request versions with coloured Led

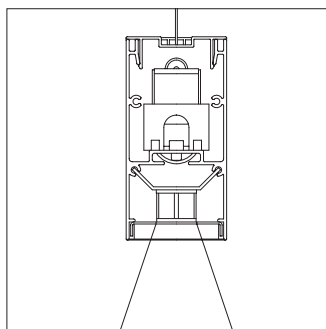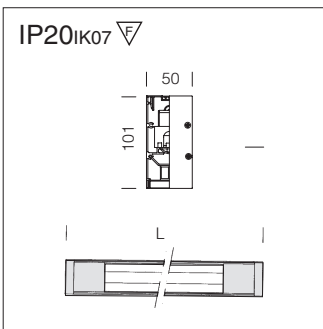




**Liset suspension with POWERLED** **CELL**  
 L = 1000 1x1,4W LED bianco natural oxidised alum. **16075**  
 Completed with 10 powered of 1,4W each. Price on request.

**Liset suspension with POWERLED RGB** **CELL**  
 L = 1000 10x3,2W LED RGB natural oxidised alum. **16074**  
 Completed with 10 LED RGB of 3,2W each. KIT2 cod 90873 is to be acquired separately (completed with plate, Master, Slave, 2 power supplies and a terminal block).


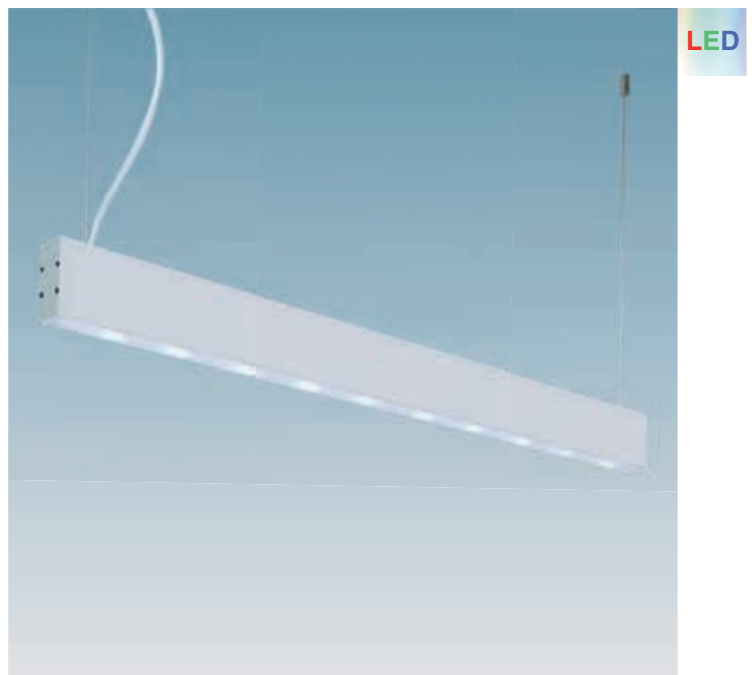




mt	Watt	colour	Code
			Fosnova

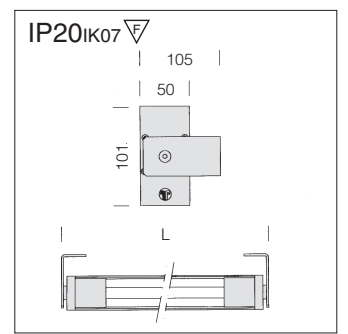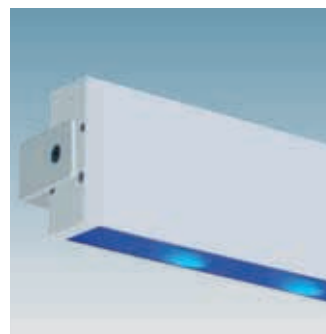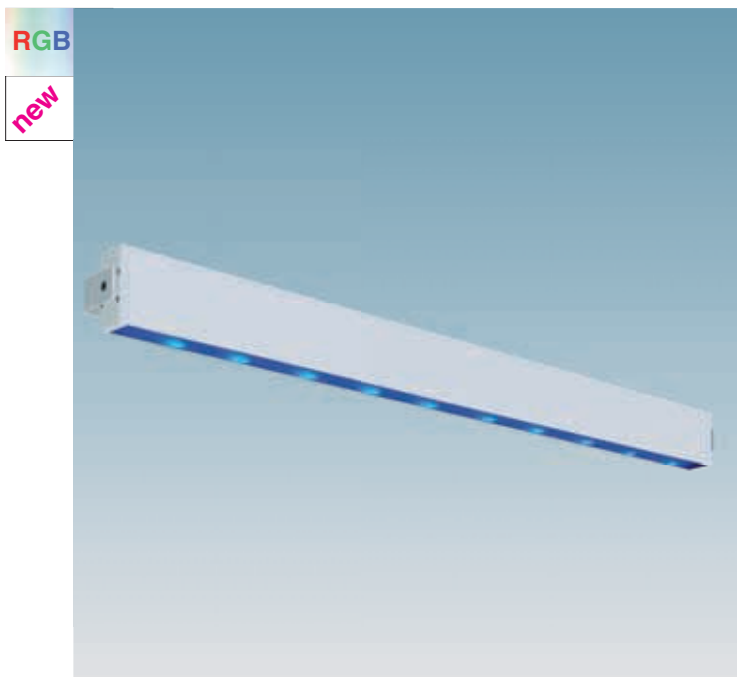

**Liset RGB wall version** **CELL**  
 L = 1020 **10x3,2W LED RGB** natural oxidised alum. **16774**  
 Completed with 10 LED RGB of 3,2W each. KIT2 cod 90873 is to be acquired separately (completed with plate, Master, Slave, 2 power supplies and a terminal block).

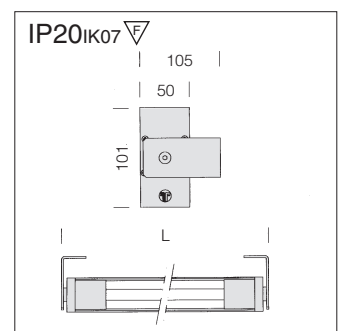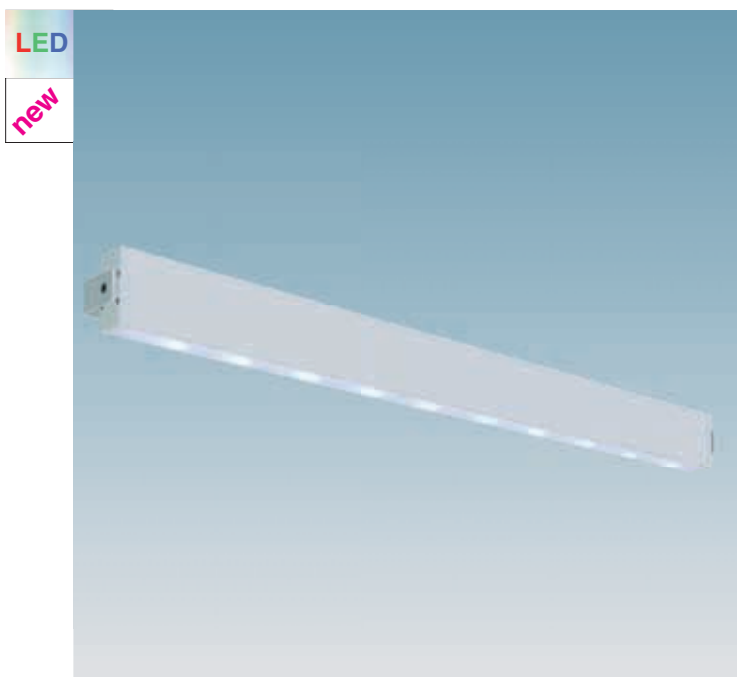

**Liset LED White 6500K wall version** **CELL**  
 L = 1020 **10x1,4W LED white** natural oxidised alum. **16772**  
 Completed with 10 LED WHI of 1,4W each. 6500K.


**Liset LED White 3200K wall version** **CELL**  
 L = 1020 **10x1,4W LED white** natural oxidised alum. **16778**  
 Completed with 10 LED WHI of 1,4W each. 3200K.

The versatile new versions of LISET use RGB LEDs, they are more efficient than other LED products and convey the power of 12 three-colour 3W LED lights. The sophisticated shape of these luminaires suits recessed decorative architectural applications mostly for outdoor use, in pedestrianized areas.


These new colour switching versions combine high efficiency with an advanced electronic colour mixing system, they are highly reliable and require very little maintenance and they are long-lasting. Other characteristics include: low consumption, cold performance and quick response time.

This newly developed elliptical group also offers excellent performance and colour uniformity in installations placed closer, as they can capture and convey more light.



LISET is a compact and fairly light luminaire and weatherability is guaranteed by the IP67 protection level. A functional installation system enables different positions. A standard DMX 512 digital control system, a pre-set programme selection and a master-slave mode guarantee the simple handling of all the luminaire functions.

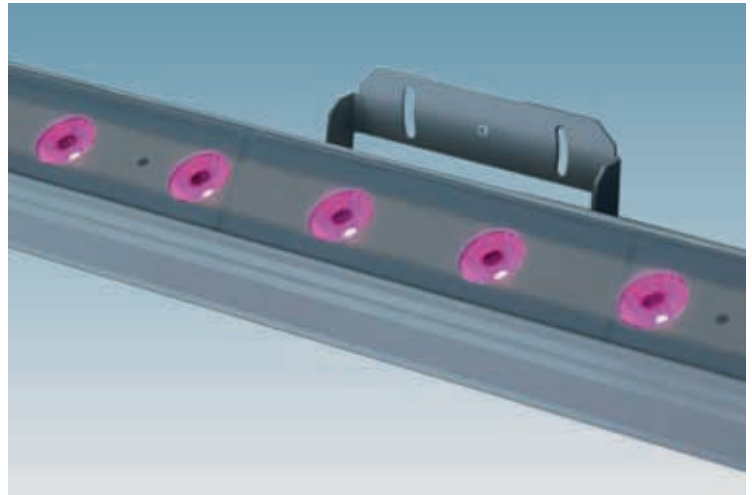

mt	Watt	colour	Code 'fosnova
----	------	--------	------------------

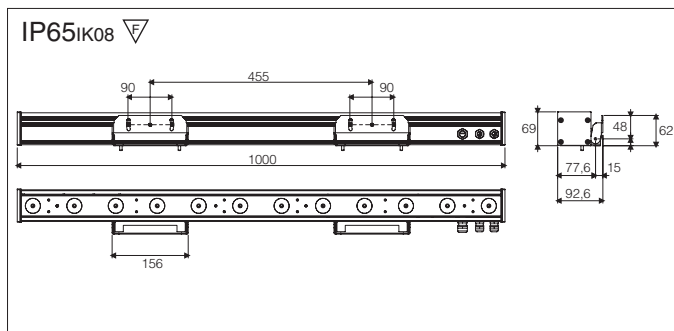


**Liset RGB MUTANTI wall version** **CELL**  
 L = 1000 **12x3W LED RGB** natural oxidised alum. **16770**  
 Completed with adjustable bracket and 12 LED RGB of 3W each one. Beam opening: 12°, average duration: 100000h.

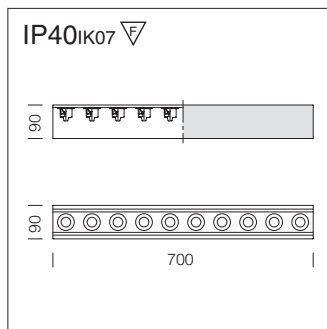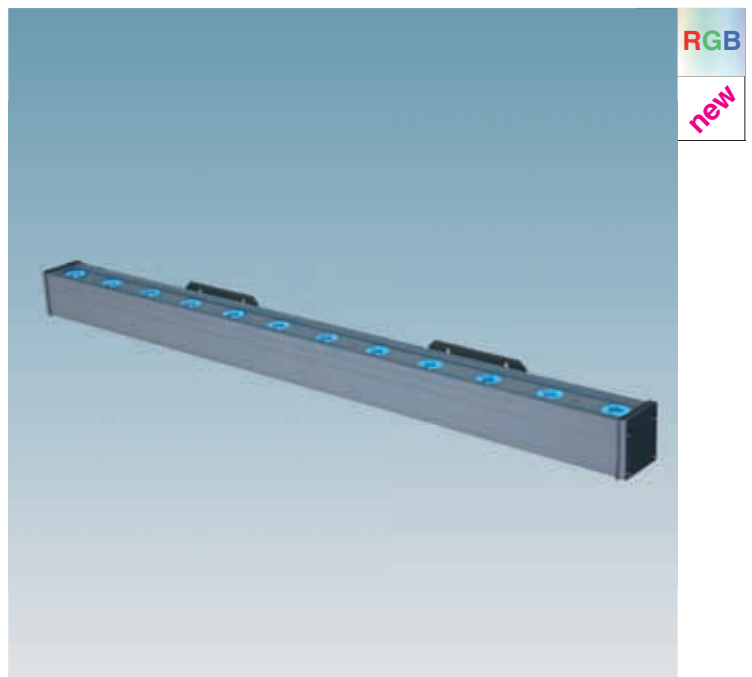



**Liset IP40 POWERLED** **CELL**  
 L = 1000 **15x1,4W LED white** white **16775**  
 IP40 version for interiors. Completed with 10 LED whi of 1,4W each.

**Liset IP40 POWERLED RGB** **CELL**  
 L = 700 **10x3,8W LED RGB** white **16779**  
 IP40 version for interiors. Completed with 10 LED RGB of 3,2W each. Colour can be controlled through DMX interface or MASTER/SLAVE control. For the futher informations contact the head office.

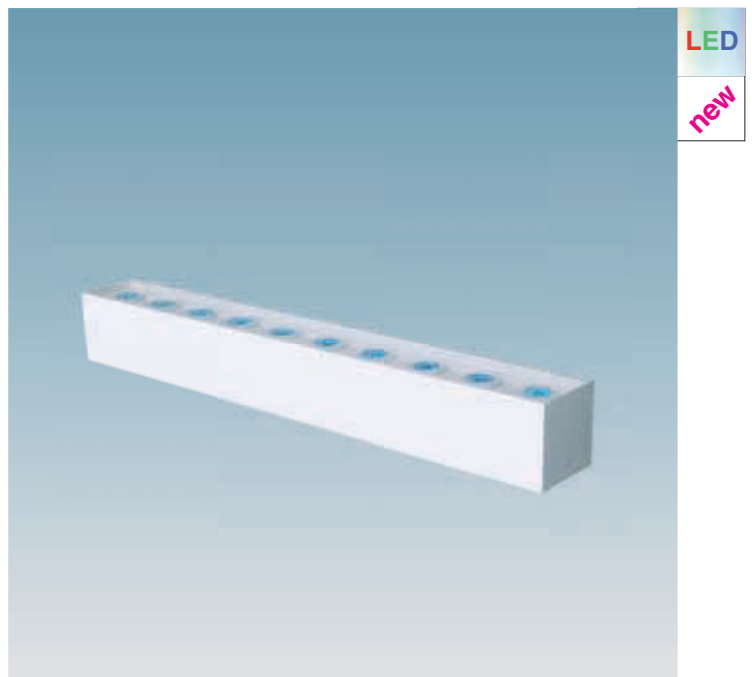


SYSTEMS



Accessories




**Powered suspension**  
100 cm **3173**  
Supplied with steel wire, millimetre adjustment device, and power cord. Max load: 20 Kg. Length 100 cm.




**Suspension with rods**  
50 cm **3177**  
Completed with rods. Max loading: 30Kg. Length: 50cm - ø10 mm.




**Suspension**  
100 cm **3171**  
Supplied with steel wire and millimetre adjustment device. Max load: 20 kg.





**Powered suspension with rods**  
50 cm **3175**  
Completed with power cord and rods. Max loading: 30Kg. ø10 mm.




**Suspension galvanised**  
**3166**  
Supplied with steel wire (l=1,75m) and millimetre adjustment device. Max load: 20 kg.





**Suspension with wire**  
100 cm **3176**  
Completed with steel wire and millimetre adjustment device. Max load: 20 kg.




**Small junction box** **acc**  
m. silver **5473**  
It is recommended for wall/ceiling application in a single/multiple composition. Contains clamp for power connection. Latch snap.





**Powered suspension with wire**  
100 cm **3174**  
Supplied with steel wire and millimetre adjustment device and power cord. Max loading: 20Kg.




**Transparent diffuser**  
1140 **25802**  
1440 **25804**  
In dust-proof plexiglass.




**Alignment brackets** **25875**  
Utilize for Liset installation in continuous line.




**Opal diffuser**  
1140 **25803**  
1440 **25805**  
In dust-proof plexiglass. Anti-glare effect.




**Ceiling tie-rod** **25873**  
Utilize for direct ceiling Liset installation.




**Suspension wire**  
steel **5226**  
In steel wire. For simple and powered suspension.



**Compendio brackets** **5383**  
Steel. To be utilized for Compendio installation on Liset.



**Cover for IP40**  
500 0,10 whi.lac. alum. **25515**  
500 0,10 bla.lac. alum. **25533**  
500 0,10 nat.oxy. alum. **25572**  
To install when Liset is completed with track as a IP40 cover, according to CEI EN 60529 standard.



**Angle joint** **25874**  
Utilize for Liset right angle installation.

Installation examples acc. Liset

