

Peroni S16

ISTRUZIONI PER IL MONTAGGIO



Si prega di conservare le seguenti istruzioni.
Please keep the following instructions.



de Majo ILLUMINAZIONE S.r.l.
30035 Mirano (VE) - Via Galilei, 34 (z.ind.).
Ufficio Commerciale Italia Tel. 041 57 29 653
e-mail: p.brunello@demajomurano.com
Export Department Tel. +39 041 57 29 654
e-mail: export@demajomurano.com
Telefax +39 041 57 02 533
www.demajomurano.com

Peroni - sospensione Ø:16 cm.

ISTRUZIONI DI MONTAGGIO

NOTA:

Prima di eseguire ogni operazione assicurarsi di aver disinserito l'alimentazione di rete.

1. Staccare il disco "A" fissato al magnete "X".
- Fissare la scatola "B" al soffitto.
2. Inserire il vetro diffusore "C" portandolo in appoggio sul disco metallico "D".
1. Infilare il cavo d'acciaio "E" nel foro del disco "A".
- Regolare la lunghezza del cavo d'acciaio "E" e fissarlo con l'apposito blocco "F".
- Regolare la lunghezza del cavo elettrico e fissarlo con l'apposito bloccacavo "G".
- Eseguire il collegamento alla morsettiera di alimentazione curando di far corrispondere i fili di alimentazione negli alloggi contraddistinti dalle sigle L-N, mentre il filo di terra giallo/verde dovrà essere inserito nella posizione contrassegnata dal simbolo di terra ⊕.
- Fissare il disco "A" al magnete "X".
- Inserire la lampadina 1 x MAX 100W E27 goccia opalina o 1 x MAX 100W E27 PAR 30 o 1 x MAX 23W E27 fluorescente.

ASSEMBLY INSTRUCTIONS

WARNING:

Before proceeding with the assembly operation, disconnect the electrical supply at the fuseboard.

1. Take off plate "A" fixed to the magnet "X".
- Fix the metal box "B" to the ceiling.
2. Insert the glass shade "C" till it lays on the metal disk "D".
1. Thread the steel cable "E" through the hole of disk "A".
- Adjust the length of steel cable "E" and fix it with the block "F".
- Adjust the length of wire and fix it with the cable clamp screw "G".
- Connect the electrical wires at the terminal caring the supply cables are inserted in the special lodgings L-N, and the earth yellow/green one to the lodging marked with the earth symbol ⊕.
- Fix plate "A" to magnet "X".
- Insert 1 x MAX 100W E27 opaline sphere or 1 x MAX 100W E27 PAR 30 or 1 x MAX 23W E27 fluorescent.

Fig.1


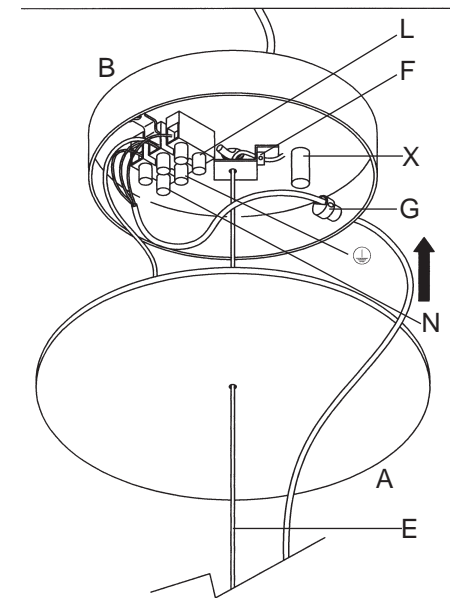


Fig.2

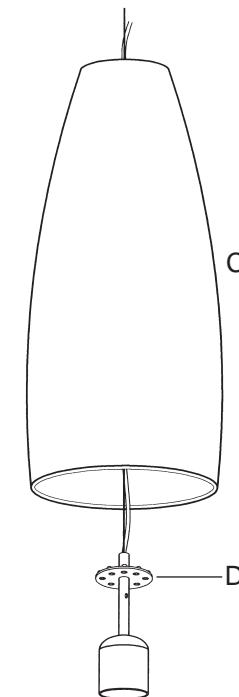

Apparecchio predisposto per il montaggio diretto su superfici normalmente in infiammabili
Luminaire suitable for direct mounting on normally inflammable surfaces.